


## Hoesch U-Type Sheet Piles

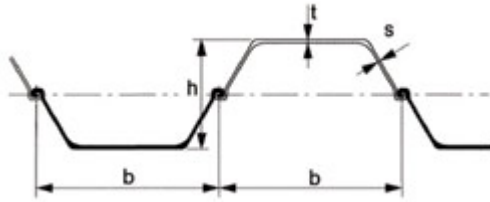

Type	Width	Height	Back	Web	Weight	Weight	Section Modulus	Moment of Inertia
	mm	mm	mm	mm	kg/m	kg/m <sup>2</sup>	cm <sup>3</sup>	cm <sup>4</sup>
Larssen 755	750	450	11.7	10.0	95.6	127.5	2000	45000
Larssen 703	700	400	9.5	8.0	67.5	96.4	1210	24200
Larssen 703 K	700	400	10.0	9.0	72.1	103.0	1300	25950
Larssen 704	700	400	10.2	9.5	80.5	115.0	1600	35200
Larssen 600	600	150	9.5	9.5	56.4	94.0	510	3840
Larssen 600 K	600	150	10.0	10.0	59.4	99.0	540	4050
Larssen 601	600	310	7.5	6.4	46.3	77.2	745	11520
Larssen 602	600	310	8.2	8.0	53.4	89.0	830	12870
Larssen 603	600	310	9.7	8.2	64.8	108.0	1200	18600
Larssen 603 K	600	310	10.0	9.0	68.1	113.5	1240	19220
Larssen 604	600	380	10.5	9.0	74.5	124.2	1620	30710
Larssen 605	600	420	12.5	9.0	83.5	139.2	2020	42370
Larssen 605 K	600	420	12.2	10.0	86.7	144.5	2030	42550
Larssen 606 n	600	435	14.4	9.2	94.2	157.0	2500	54375
Larssen 607 n	600	452	19.0	10.6	114.0	190.0	3200	72320
Larssen 23	500	420	11.5	10.0	77.5	155.0	2000	42000
Larssen 24	500	420	15.6	10.0	87.5	175.0	2500	52500
Larssen 24/12	500	420	15.6	12.0	92.7	185.4	2550	53610
Larssen 25	500	420	20.0	11.5	103.0	206.0	3040	63840
Larssen 43	500	420	12.0	12.0	83.0	166.0	1660	34900

Type	Width	Height	Back	Web	Weight	Weight	Section Modulus	Moment of Inertia
	mm	mm	mm	mm	kg/m	kg/m <sup>2</sup>	cm <sup>3</sup>	cm <sup>4</sup>
Larssen 430	708	750	12.0	12.0	83.0	243.5	6450	241800

Standard pile lengths up to 30 m.

Lengths from 30 to 36 m available on request.

Standard steel grades S240GP, S270GP, S320GP, S355GP, S390GP, S430GP.

Most Larssen sections are also available as rolled-up and rolled-down version of -0,5 and +0,5 mm.

Other available hot rolled steel profiles are:

- Hoesch sheet piles (Z-sections)
- Union straight web sections
- Combi wall systems
- Peiner steel piles
- Various corner and weld-on sections